


HS-54TBN 420~440-S3


22.5%



12
1%

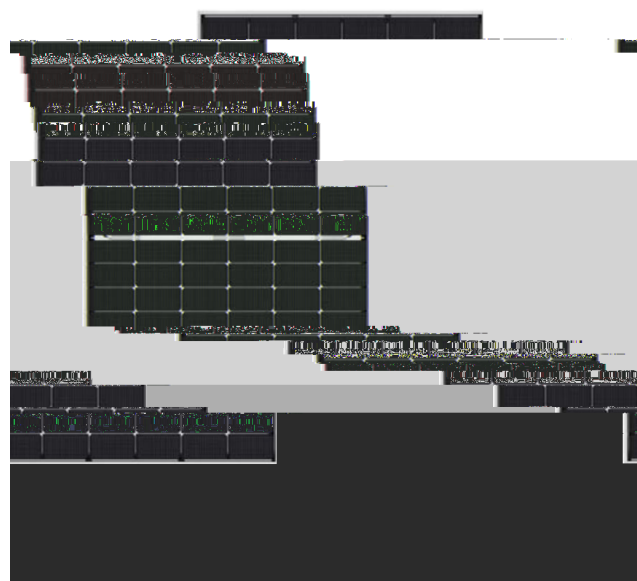

30
0.4%

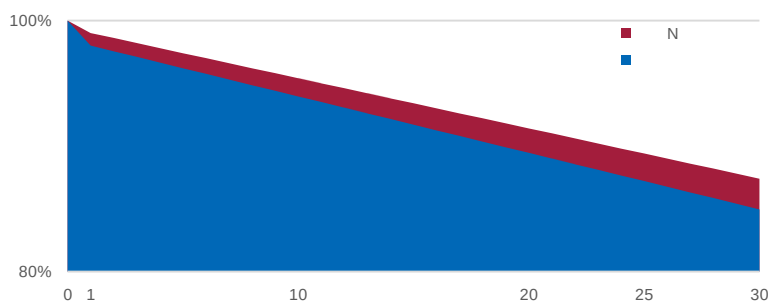

IEC61215(2016), IEC61730(2016)

ISO9001:2015:

ISO14001:2015:

ISO45001:2018:



每托尺寸 1778×1140×1250mm

双面因子	80±5%
------	-------

5%	最大功率(Pmax)	437Wp	443Wp	448Wp	453Wp	459Wp
	(%)	22.40%	22.67%	22.94%	23.21%	23.48%
10%	最大功率(Pmax)	455Wp	460Wp	466Wp	472Wp	477Wp
	(%)	23.29%	23.57%	23.86%	24.15%	24.43%
15%	最大功率(Pmax)	472 Wp	478 Wp	484Wp	490Wp	496Wp
	(%)	24.17%	24.47%	24.78%	25.09%	25.39%